
CARTA DE ALTITUDE MÍNIMA DE VIGILÂNCIA ATC - ATCSMAC

ATC SURVEILLANCE MINIMUM ALTITUDE CHART - ATCSMAC

SBFL ELEV 17' TA 9000'

APP FLORIANÓPOLIS 119.50 119.65 128.95 129.45 129.60

TMA FLORIANÓPOLIS (SBXF)

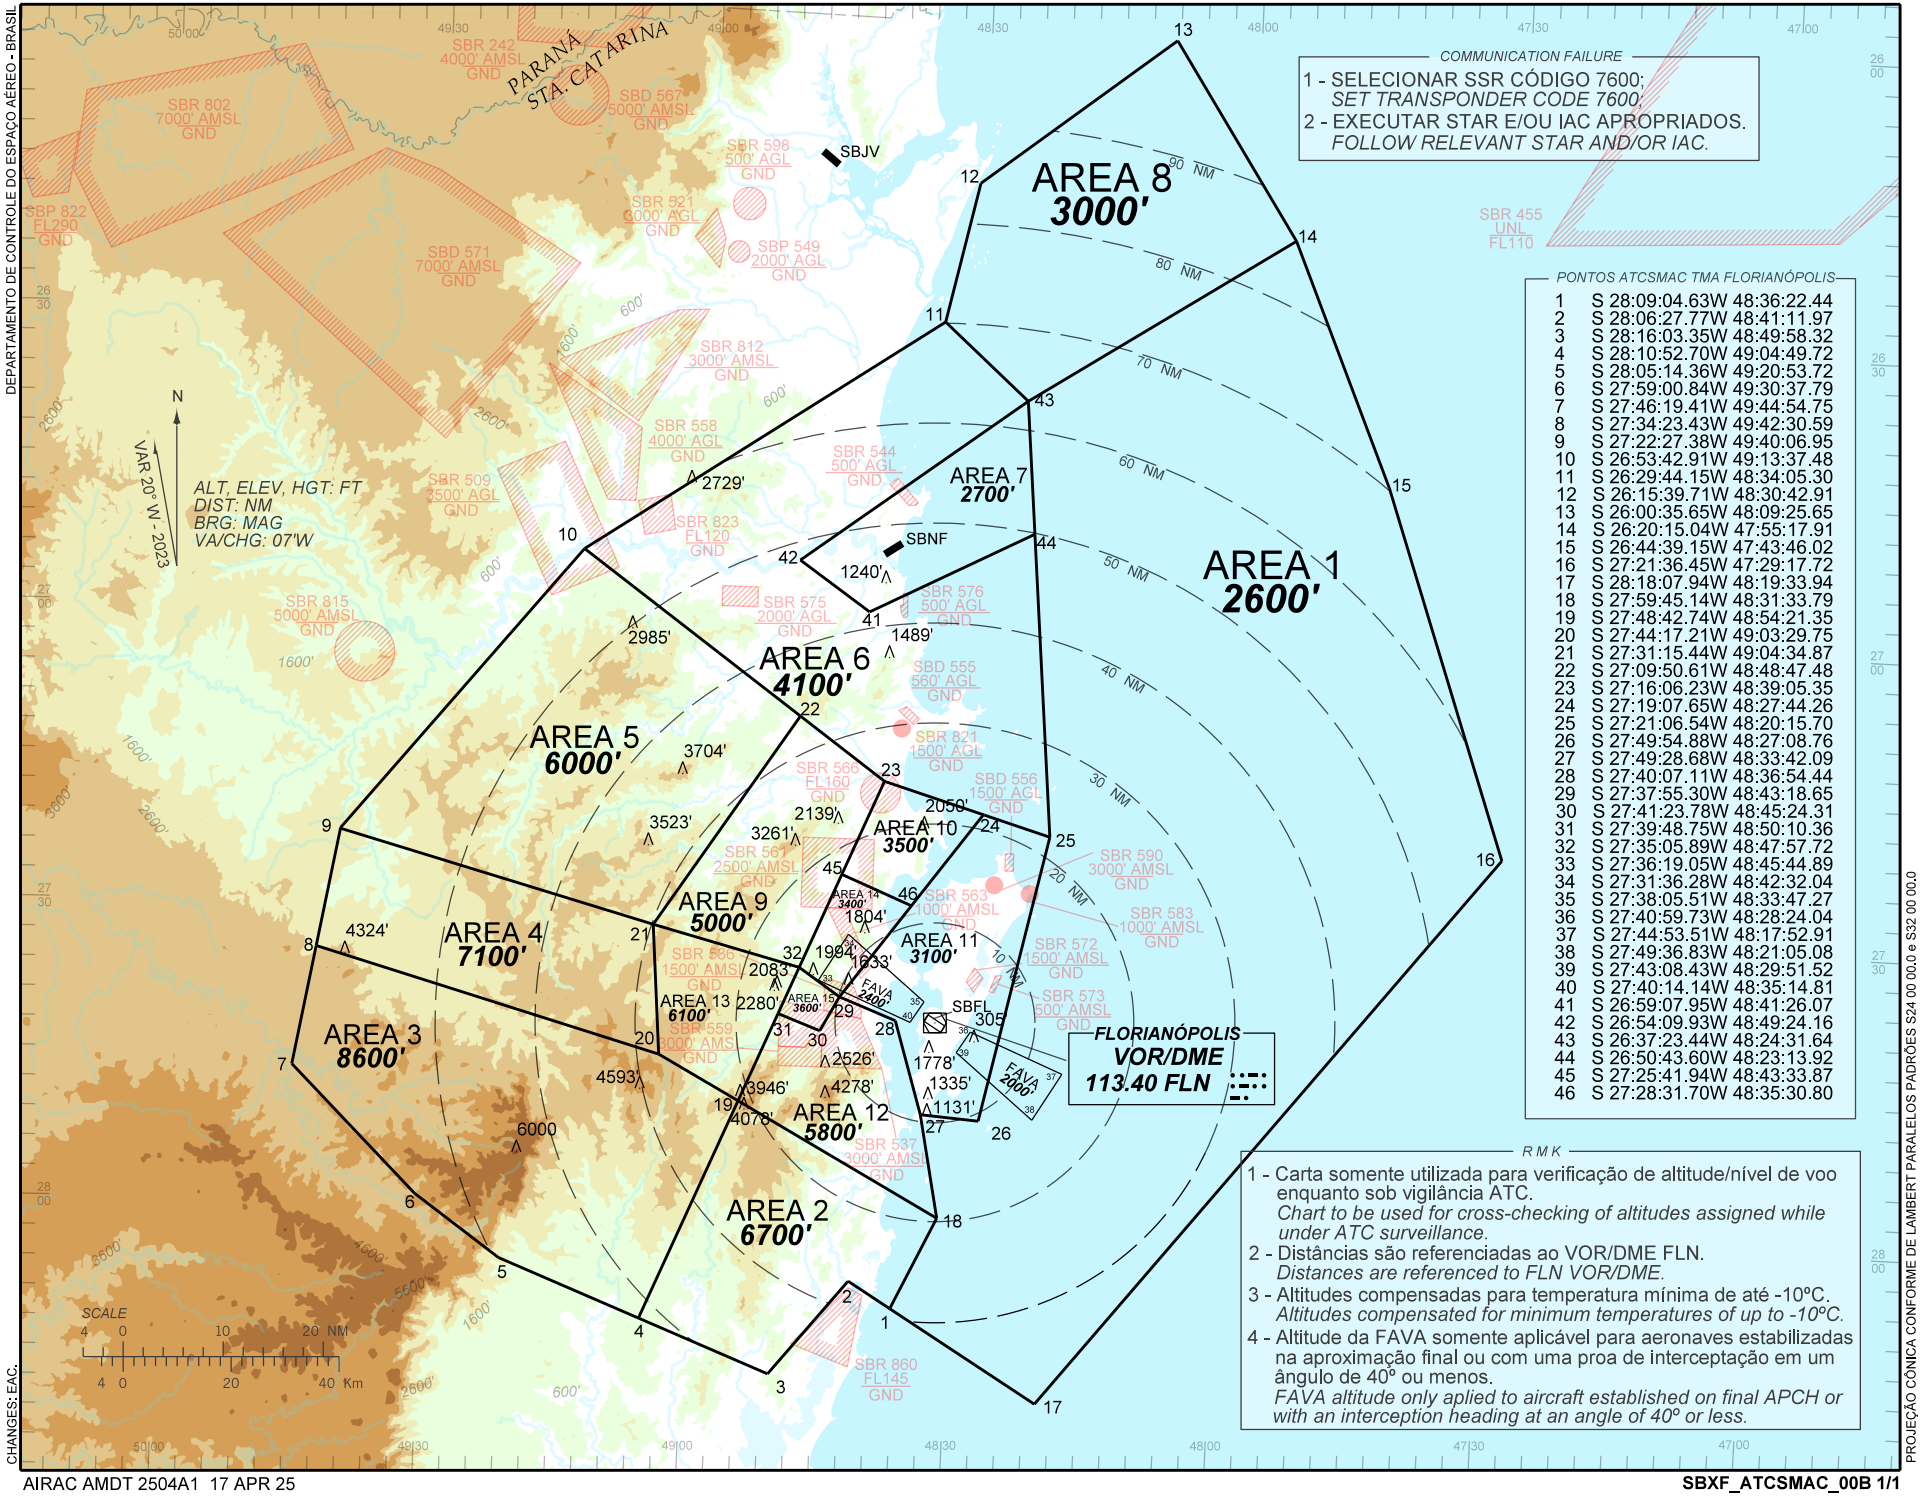

COMMUNICATION FAILURE

1 - SELECIONAR SSR CÓDIGO 7600;
SET TRANSPONDER CODE 7600;
2 - EXECUTAR STAR E/OU IAC APROPRIADOS.
FOLLOW RELEVANT STAR AND/OR IAC.

PONTOS ATCSMAC TMA FLORIANÓPOLIS

1	S 28:09:04.63W 48:36:22.44
2	S 28:06:27.77W 48:41:11.97
3	S 28:16:03.35W 48:49:58.32
4	S 28:10:52.70W 49:04:49.72
5	S 28:05:14.36W 49:20:53.72
6	S 27:59:00.84W 49:30:37.79
7	S 27:46:19.41W 49:44:54.75
8	S 27:34:23.43W 49:42:30.59
9	S 27:22:27.38W 49:40:06.95
10	S 26:53:42.91W 49:13:37.48
11	S 26:29:44.15W 48:34:05.30
12	S 26:15:39.71W 48:30:42.91
13	S 26:00:35.65W 48:09:25.65
14	S 26:20:15.04W 47:55:17.91
15	S 26:44:39.15W 47:43:46.02
16	S 27:21:36.45W 47:29:17.72
17	S 28:18:07.94W 48:19:33.94
18	S 27:59:45.14W 48:31:33.79
19	S 27:48:42.74W 48:54:21.35
20	S 27:44:17.21W 49:03:29.75
21	S 27:31:15.44W 49:04:34.87
22	S 27:09:50.61W 48:48:47.48
23	S 27:16:06.23W 48:39:05.35
24	S 27:19:07.65W 48:27:44.26
25	S 27:21:06.54W 48:20:15.70
26	S 27:49:54.88W 48:27:08.76
27	S 27:49:28.68W 48:33:42.09
28	S 27:40:07.11W 48:36:54.44
29	S 27:37:55.30W 48:43:18.65
30	S 27:41:23.78W 48:45:24.31
31	S 27:39:48.75W 48:50:10.36
32	S 27:35:05.89W 48:47:57.72
33	S 27:36:19.05W 48:45:44.89
34	S 27:31:36.28W 48:42:32.04
35	S 27:38:05.51W 48:33:47.27
36	S 27:40:59.73W 48:28:24.04
37	S 27:44:53.51W 48:17:52.91
38	S 27:49:36.83W 48:21:05.08
39	S 27:43:08.43W 48:29:51.52
40	S 27:40:14.14W 48:35:14.81
41	S 26:59:07.95W 48:41:26.07
42	S 26:54:09.93W 48:49:24.16
43	S 26:37:23.44W 48:24:31.64
44	S 26:50:43.60W 48:23:13.92
45	S 27:25:41.94W 48:43:33.87
46	S 27:28:31.70W 48:35:30.80

RMK

1 - Carta somente utilizada para verificação de altitude/nível de voo enquanto sob vigilância ATC.
Chart to be used for cross-checking of altitudes assigned while under ATC surveillance.
2 - Distâncias são referenciadas ao VOR/DME FLN.
Distances are referenced to FLN VOR/DME.
3 - Altitudes compensadas para temperatura mínima de até -10ºC.
Altitudes compensated for minimum temperatures of up to -10ºC.
4 - Altitude da FAVA somente aplicável para aeronaves estabilizadas na aproximação final ou com uma proa de interceptação em um ângulo de 40º ou menos.
FAVA altitude only aplied to aircraft established on final APCH or with an interception heading at an angle of 40º or less.

DEPARTAMENTO DE CONTROLE DO ESPAÇO AÉREO - BRASIL

CHANGES: EAC.

PROJEÇÃO CÔNICA CONFORME DE LAMBERT PARALELOS PADRÕES S24 00 00.0 e S32 00 00.0