

INSTRUMENT APPROACH  
CHART (IAC)

SÃO LUÍS / Marechal Cunha Machado, INTL (SBSL)



AD ELEV: 177'

VOR Y RWY 24

D-ATIS NIL	APP SÃO LUÍS 119.45		TWR SÃO LUÍS 118.90	GNDC NIL
VOR SLI 113.50 MHz	FINAL CRS 245°	FAF: 1530'	N/A	VOR MDA / (OCH): 630' / (490')

APCH Perdida: 1) Subir para 4000'. Manter RDL 245 VOR SLI até 1300'. Após, curvar à ESQUERDA proa 060 para interceptar e manter RDL 105 VOR SLI até BUTAK para espera. 2) IAS MAX 220KT.

Missed APCH: 1) Climb to 4000'. Maintain 245 SLI VOR RDL until 1300'. After, turn LEFT heading 060 to intercept and maintain 105 SLI VOR RDL to BUTAK for holding. 2) IAS MAX 220KT.

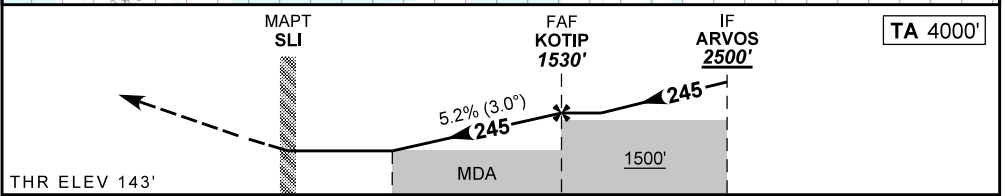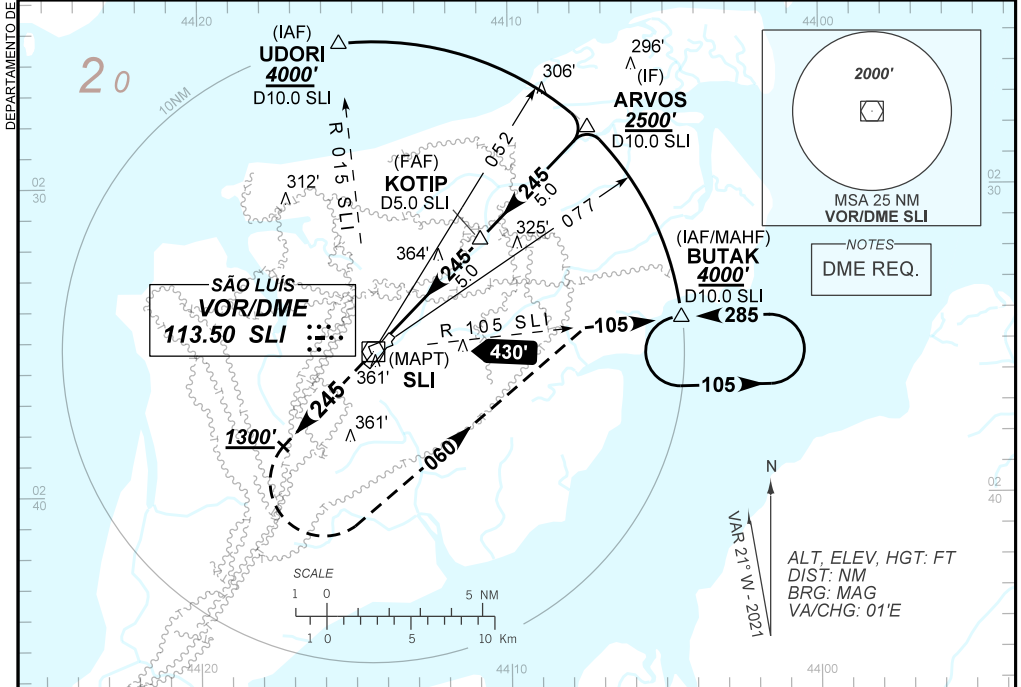

0.0	1.4	4.2	9.2	TO THR 24 (NM)
0.8	2.2	5.0	10.0	TO SLI (DME)

RWY24	1.4	2.0	3.0	4.0	KOTIP	Ground Speed (KT)	090	110	130	150	170	190
ALT	630	830	1148	1467	1530	FPM	500	600	700	800	900	1000
(HGT)	490	687	1005	1324	1387	FAF-MAPT	NA					

STRAIGHT-IN	CAT	A	B	C	D	E
	MDA / (OCH)	630' / (490')				
VOR	ALS/NO ALS/ RVR ALS (m)	NIL / 1600 / NIL		NIL / 2300 / NIL		
CIRCLING	MDA / (OCH)	NA				
	VIS (m)					

CHANGES: FREQ. LAYOUT.