

**INSTRUMENT APPROACH
CHART (IAC)**

**OIAPOQUE / Oiapoque (SBOI)
RNP Z RWY 03
(CAT A, B, C)**



AD ELEV: 53'

ATIS NIL	APP NIL	AFIS OIAPOQUE 125.90	GNDC NIL
TEMP LNAV/VNAV MIN 10°C / MAX 45°C	FINAL CRS 030°	FAF: 1700'	LNAV/VNAV DA / (OCH): 456' / (403')
		MDA / (OCH): 560' / (510')	

APCH Perdida: Subir para **3000'** na proa **050**. Após cruzar **1200'**, curvar à DIREITA direto para OI019 para espera.
Missed APCH: Climb to **3000'** on heading **050**. After passing **1200'**, turn RIGHT direct to OI019 for holding.

RMK: NIL.

DEPARTAMENTO DE CONTROLE DO ESPAÇO AEREO

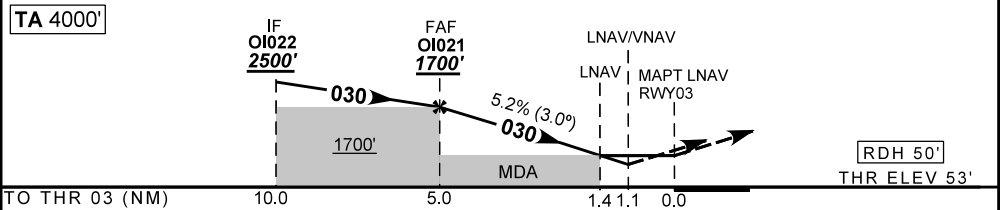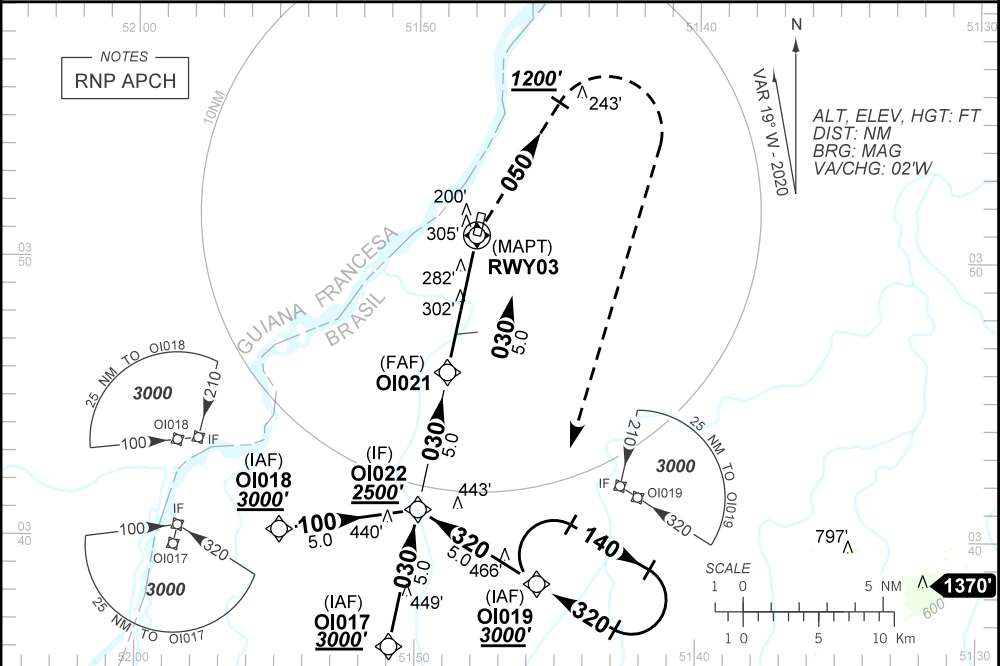

	OI021	4.0	3.0	2.0	1.4	RWY03	KT	090	110	130	150	170	190
	1700	1377	1058	740	560	ALT	FPM	500	600	700	800	NA	
	1647	1324	1005	687	510	(HGT)	FAF-MAPT	NA					

STRAIGHT-IN	CAT	A	B	C	D	E
	DA / (OCH)	456' / (403')				
LNAV/VNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 1900 / NIL				
	MDA / (OCH)	560' / (510')				
LNAV	ALS/NO ALS/RVR ALS (m)	NIL / 1900 / NIL		NIL / 2400 / NIL		
	MDA / (OCH)	NA				
CIRCLING	MDA / (OCH)	NA				
	VIS (m)	NA				

CHANGES: ADEL DA IDENT. LAYOUT, MDA, PROC. THEL, TAA