


AD ELEV: 220'

ARP S05 03 38 W042 49 28

ATIS 127.80	CLRD NIL	GNDC NIL	TWR 118.80	APRON NIL
----------------	-------------	-------------	---------------	--------------

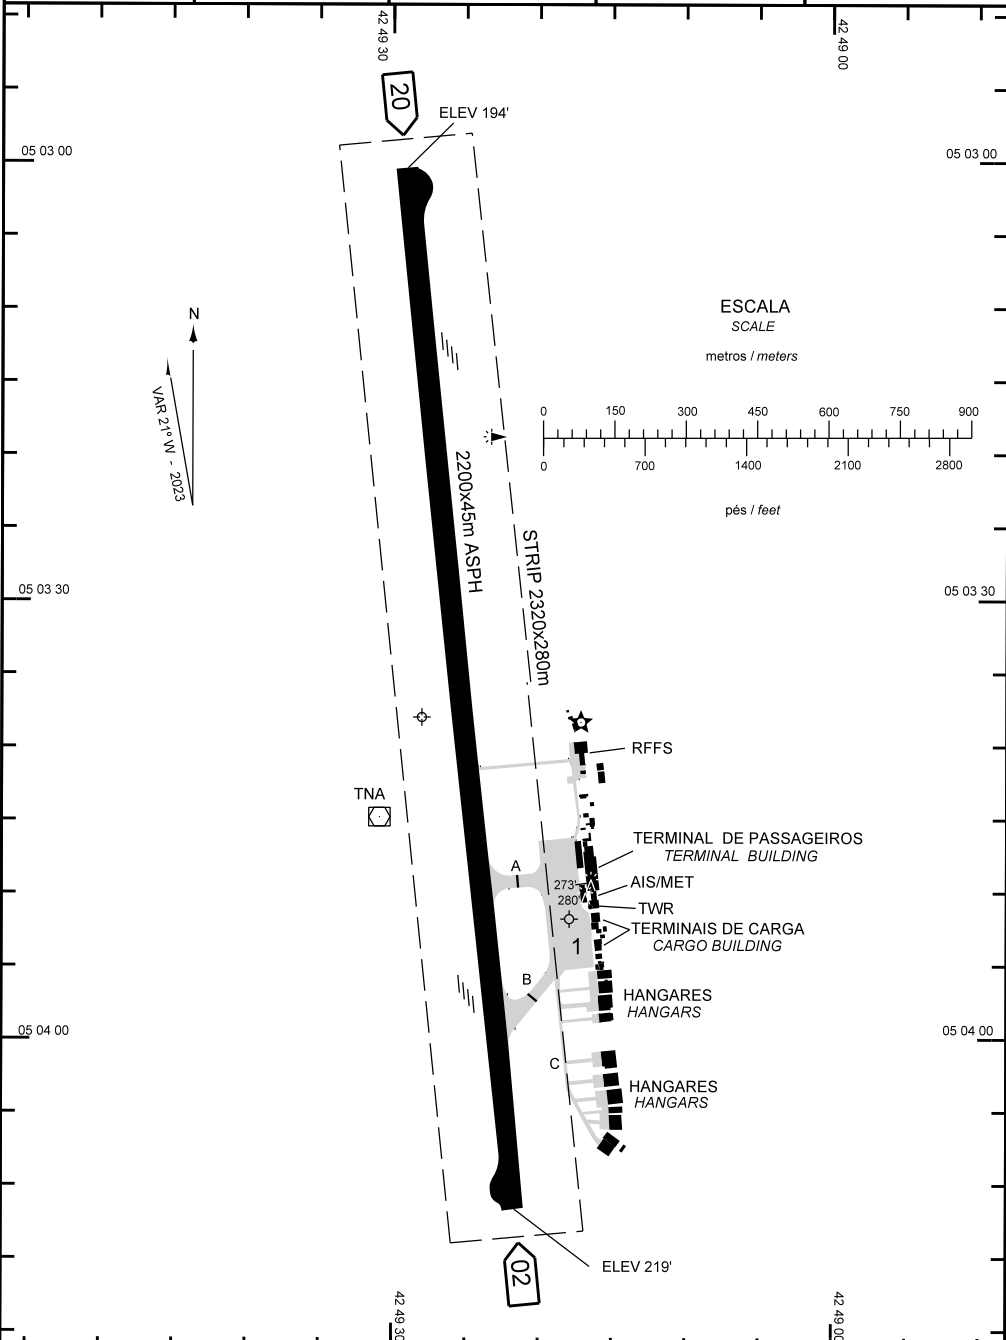

CHANGES:RMK

ADC - SBTE: INFORMAÇÕES COMPLEMENTARES / COMPLEMENTARY INFORMATION


CARACTERÍSTICAS FÍSICAS / PHYSICAL CHARACTERISTICS											
PISTA RUNWAY				DIMENSÕES(m) DIMENSIONS(m)				PCN	TIPO DE SUPERFÍCIE SURFACE KIND		
RWY	BRG MAG	Tipo Type	RCD	RWY	SWY	CWY	STRIP	RWY	RWY	SWY	
a	b	c	d	e	f	g	h	i	j	k	
02	015	NPA	4C	2200x45			2320 x 280	46/F/A/X/T	ASPH		
20	195	NPA	4C								

DISTÂNCIAS DECLARADAS, AUXÍLIOS VISUAIS E COORDENADAS DAS CABECEIRAS DECLARED DISTANCES, VISUAL AIDS AND THRESHOLD COORDINATES							
RWY	TORA(m)	TODA(m)	ASDA(m)	LDA(m)	AUXÍLIOS / AIDS	ALTURA GEODAL(m) GEOD HEIGHT(m)	COORDENADAS COORDINATES
02	2200	2200	2200	2200	PAPI	-21,29	S05 04 12 W042 49 22
20	2110	2200	2110	2110	PAPI	-21,29	S05 03 00 W042 49 29


SERVIÇO DE SALVAMENTO E CONTRAINCÊNDIO / RESCUE AND FIRE FIGHTING SERVICE: RFFS REQ - 7

RWY 02 / 20

Sinalização horizontal / Marking Aids



Auxílios luminosos / Lighting Aids



- RMK:** 1) MEHT: PAPI RWY 02 - 73FT
MEHT: PAPI RWY 20 - 61FT
- 2) GROOVING : RWY 02/20
- 3) RWY 02/20 AUTH GIRO 180 DEG PARA ACFT COM ENVERGADURA SUPERIOR A 15M SOMENTE NAS THR.
RWY 02/20 AUTH TWIRL 180 DEG ACFT WITH WINGSPAN GREATER THAN 15M ONLY IN THR.
- 4) RWY 20 ÚLTIMOS 90M CLSD PARA LDG/TKOF DEVIDO PROVIMENTO DE RESA.
RWY 20 LAST 90M CLSD FOR LDG/TKOF DUE TO RESA PROVISION.

CHANGES: RMK