


AD ELEV: 169'

ARP S05 54 30 W035 14 57

D-ATIS 132.65	D-CL NIL	GNDC 121.90	TWR 118.70 122.80	APRON NIL
------------------	-------------	----------------	----------------------	--------------

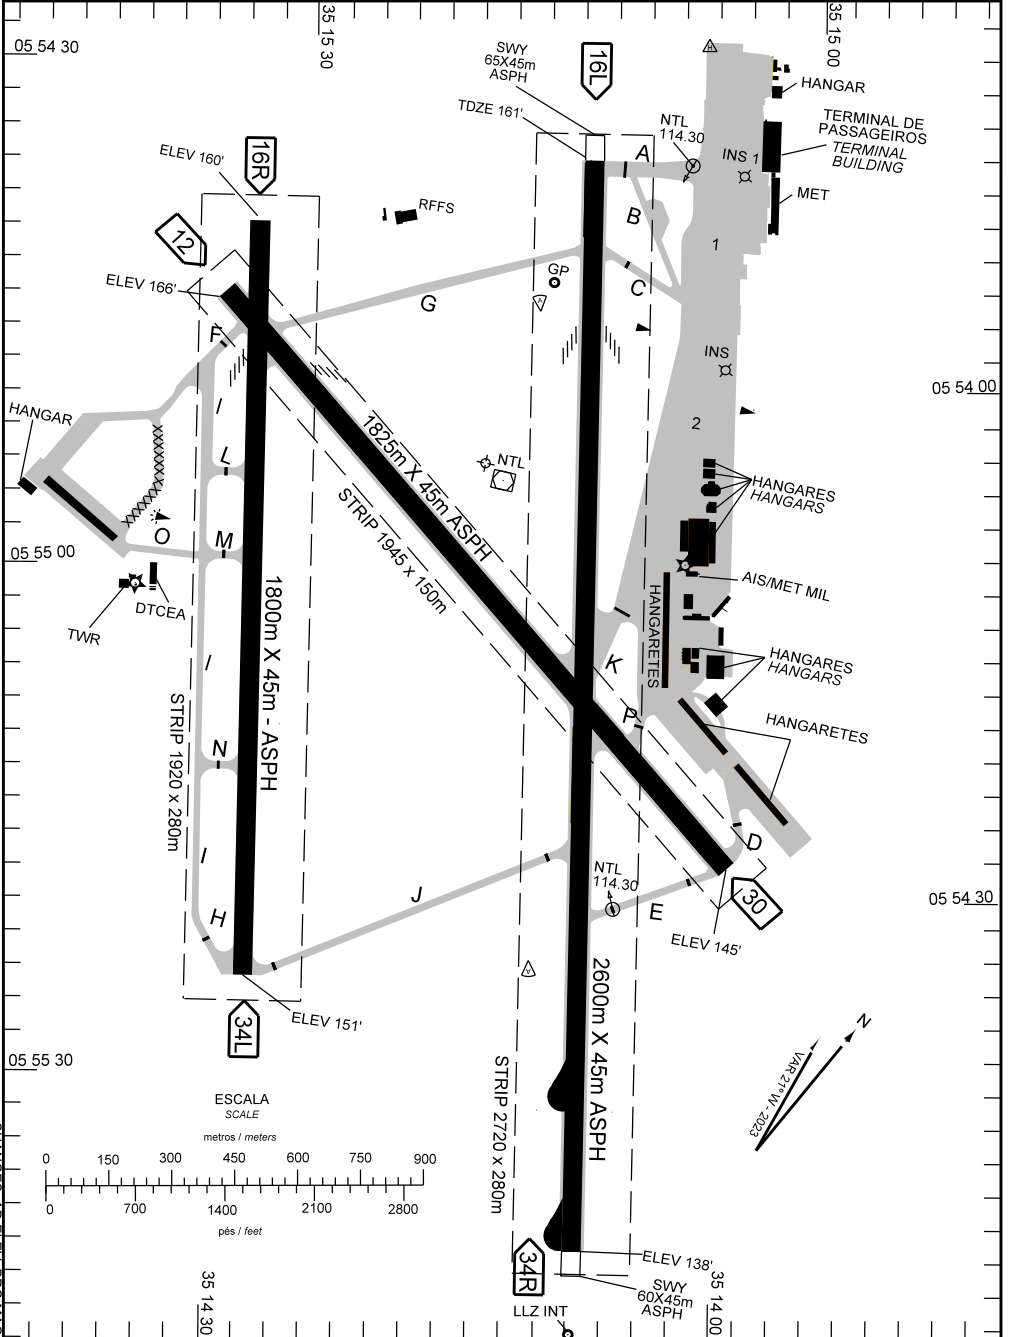

CHANGES: AD ELEV - BRG MAG.

ADC - SBNT: INFORMAÇÕES COMPLEMENTARES / COMPLEMENTARY INFORMATION


CARACTERÍSTICAS FÍSICAS / PHYSICAL CHARACTERISTICS											
PISTA RUNWAY				DIMENSÕES(m) DIMENSIONS(m)				PCN	TIPO DE SUPERFÍCIE SURFACE KIND		
RWY	BRG MAG	Tipo Type	RCD	RWY	SWY	CWY	STRIP	RWY	RWY	SWY	
a	b	c	d	e	f	g	h	i	j	k	
16L 34R	162 342	PA-1 NPA	4 4	2600x45	60X45 65X45		2720 X 280	37/F/A/X/T	ASPH	ASPH ASPH	
16R 34L	162 342	NPA NPA	4 4	1800x45			1920 X 280	40/F/A/X/T	ASPH		
12 30	120 300	NPA NPA	4 4	1825x45			1945 X 150	40/F/A/X/T	ASPH		

DISTÂNCIAS DECLARADAS, AUXÍLIOS VISUAIS E COORDENADAS DAS CABECEIRAS DECLARED DISTANCES, VISUAL AIDS AND THRESHOLD COORDINATES


RWY	TORA(m)	TODA(m)	ASDA(m)	LDA(m)	AUXÍLIOS / AIDS	ALTURA GEOIDAL(m) GEOID HEIGHT(m)	COORDENADAS COORDINATES
16L 34R	2600 2600	2600 2600	2660 2665	2600 2600	PAPI	- 5,02 - 5,02	S05 54 07 W035 15 06 S05 55 12 W035 14 12
16R 34L	1800 1800	1800 1800	1800 1800	1800 1800	PAPI (3.01°)	- 5,01 - 5,01	S05 54 27 W035 15 22 S05 55 12 W035 14 46
12 30	1825 1825	1825 1825	1825 1825	1825 1825	PAPI (2.98°)	- 5,01 - 5,02	S05 54 33 W035 15 21 S05 54 42 W035 14 22

SERVIÇO DE SALVAMENTO E CONTRAINCÊNDIO / RESCUE AND FIRE FIGHTING SERVICE: RFFS REQ - MIL 6


RWY 16L / 34R



RWY 16R / 34L

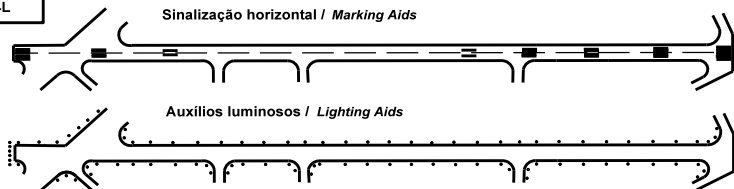

RWY 12 / 30

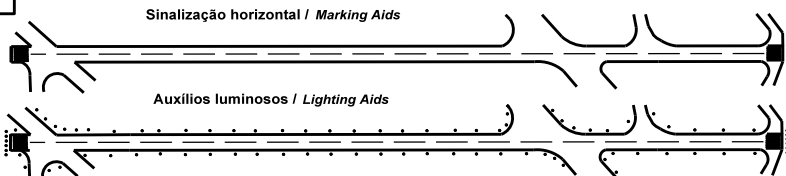

RMK:

- MEHT: RWY 16L: 73FT
RWY 16R: 55FT
RWY 12: 48FT

- PCN: TWY A - 85/F/A/X/T, TWY E - 12/R/A/X/T, TWY I - 55/F/B/X/T, TWY M - 80/F/B/X/T, Pátio Hangareres - 32/F/A/X/T, TWY B - 76/F/A/X/T, TWY F - 33/F/B/X/T, TWY J - 32/F/A/X/T, TWY N - 85/F/B/X/T, TWYC - 44/F/A/X/T, TWY G - 32/F/A/X/T, TWY K - 44/F/A/X/T, TWY O - 22/R/B/X/T, TWY D - 59/F/B/X/T, TWY H - 55/F/B/X/T, TWY L - 72/F/B/X/T, TWY P - 65/F/A/X/T, Pátio 1 - 9/F/A/X/T, Pátio 2 - 27/R/C/X/T.

CHANGES: AD ELEV, BRG MAG.