


AD ELEV: 2631'

ARP: S23 37 34 W046 39 23

D-ATIS 127.65	DCL 120.60	GNDC 121.90	TWR 118.05 127.15	APRON NIL
------------------	---------------	----------------	----------------------	--------------

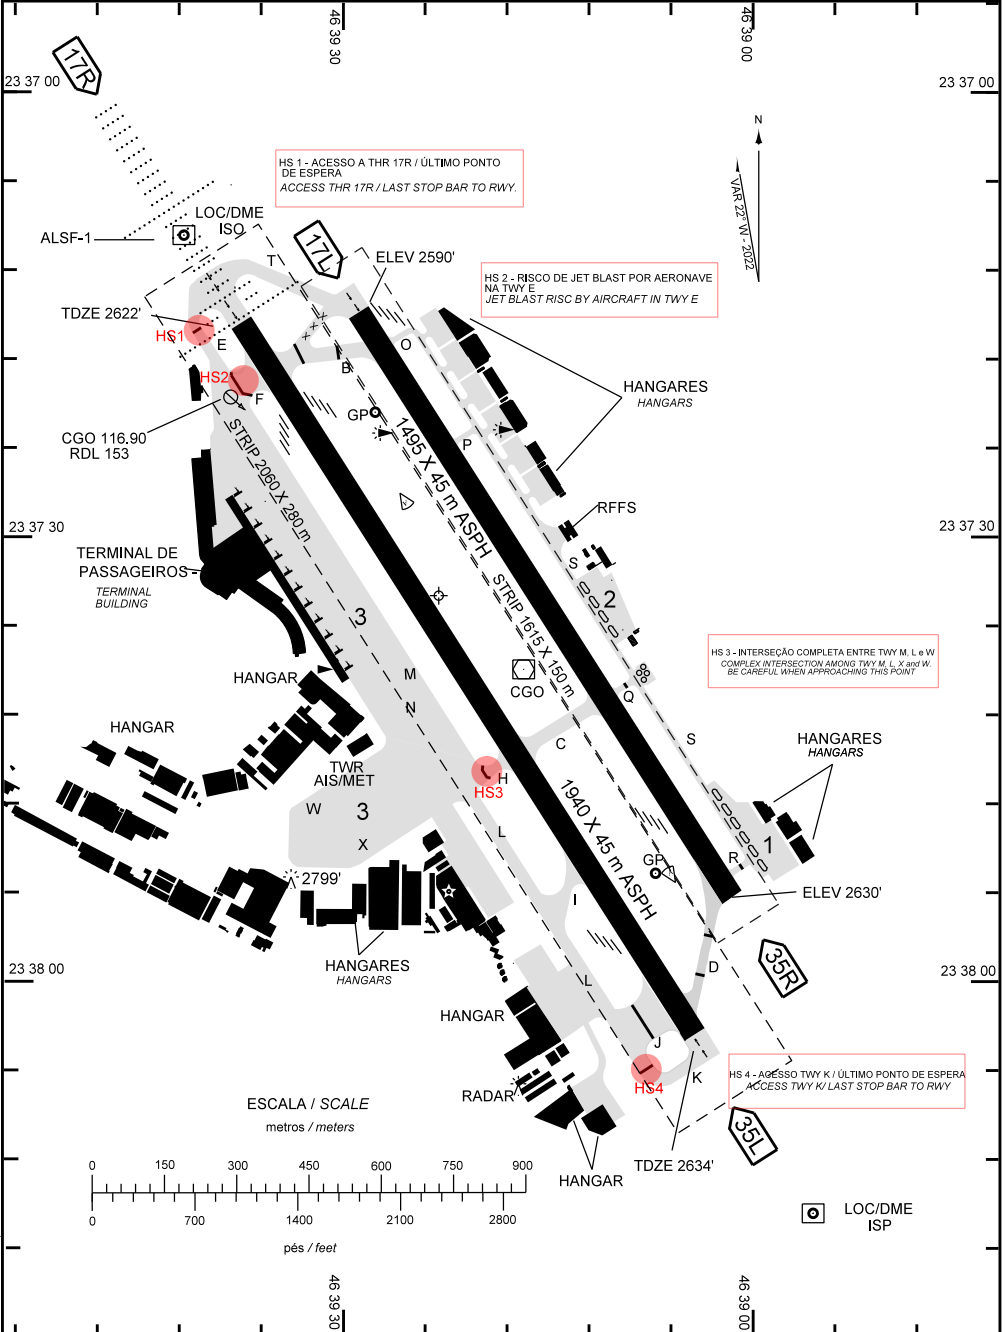

CHANGES: PAPI, RMK

**ADC - SBSP: INFORMAÇÕES COMPLEMENTARES / COMPLEMENTARY INFORMATION**

CARACTERÍSTICAS FÍSICAS / PHYSICAL CHARACTERISTICS											
PISTA RUNWAY				DIMENSÕES(m) DIMENSIONS(m)				PCN	TIPO DE SUPERFÍCIE SURFACE KIND		
RWY	BRG MAG	Tipo Type	RCD	RWY	SWY	CWY	STRIP	RWY	RWY	SWY	
a	b	c	d	e	f	g	h	i	j	k	
17R	169	PA-1	4C	1940X45			2060 X280	50/F/B/X/T	ASPH		
35L	349	PA-1	4C								
17L	169	NPA	4C	1495X45			1615 X150	38/F/B/X/U	ASPH		
35R	349	NPA	4C								
DISTÂNCIAS DECLARADAS, AUXÍLIOS VISUAIS E COORDENADAS DAS CABECEIRAS DECLARED DISTANCES, VISUAL AIDS AND THRESHOLD COORDINATES											
RWY	TORA(m)	TODA(m)	ASDA(m)	LDA(m)	AUXÍLIOS / AIDS		ALTURA GEOIDAL(m) GEOID HEIGHT(m)	COORDENADAS COORDINATES			
17R	1790	1940	1790	1660	PAPI (2,87°)	ALSF-1	- 2.22	S23 37 15 W046 39 38			
35L	1790	1940	1790	1660	PAPI		- 2.23	S23 38 03 W046 39 04			
17L	1345	1345	1345	1195	PAPI		- 2.22	S23 37 15 W046 39 29			
35R	1345	1345	1345	1195	PAPI		- 2.23	S23 37 54 W046 39 02			
SERVIÇO DE SALVAMENTO E CONTRAINCÊNDIO / RESCUE AND FIRE FIGHTING SERVICE: RFFS REQ - 7											
RWY 17R / 35L											
Sinalização horizontal/ Marking Aids											
Auxílios luminosos / Lighting Aids											
RWY 17L / 35R											
Sinalização horizontal/ Marking Aids											
Auxílios luminosos / Lighting Aids											
RMK:											
1) MEHT: PAPI - RWY 17R - 66FT RWY 35L - 61FT RWY 17L - 45FT RWY 35R - 47FT											
2) PONTO DE TOQUE DO ILS/DME ISO E PAPI RWY 35L NÃO COINCIDENTES E AFASTADOS 83M. TOUCHDOWN FOR ILS/DME ISO AND PAPI RWY 35L DO NOT COINCIDE AND ARE 83-M APART.											

CHANGES: PAPI, RMK