

**INSTRUMENT APPROACH
CHART (IAC)**

SALVADOR / Deputado Luís Eduardo Magalhães, INTL (SBSV)



AD ELEV: 66'

RNP RWY 28

D-ATIS 127.775	APP SALVADOR 119.35 119.80 120.80 129.45	TWR SALVADOR 118.60 118.95	GNDC SALVADOR 121.90
TEMP LNAV/VNAV MIN 0°C / MAX 46°C	FINAL CRS 282°	FAF: 1730'	LNNAV/VNAV DA / (OCH): 373' / (310')
		LNAV MDA / (OCH): 470' / (400')	

APCH Perdida: Subir para **4000'**. Manter proa **282** até **2200'**. Após, curvar à ESQUERDA direto ASDUT para espera.

Missed APCH: Climb to **4000'**. Maintain heading **282** until **2200'**. After, turn LEFT direct ASDUT for holding.

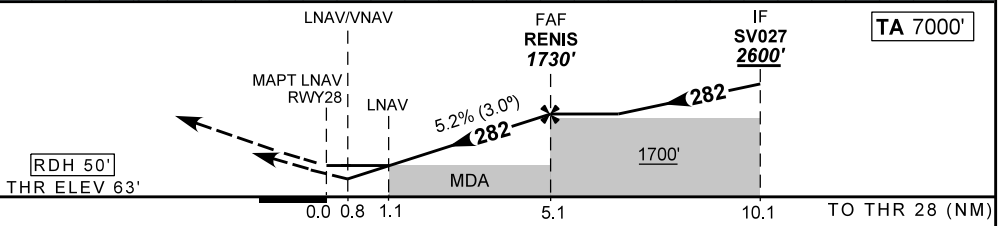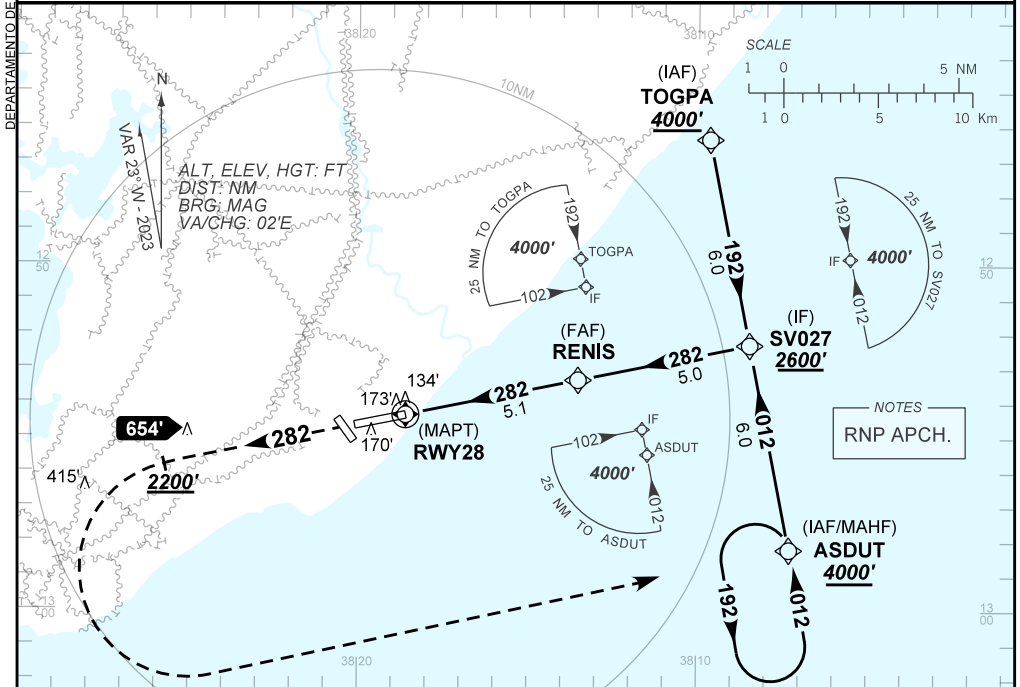

RWY28	1.1	2.0	3.0	4.0	RENIS		Ground Speed (KT)	090	110	130	150	170	190
ALT	470	750	1068	1387	1730		FPM	500	600	700	800	900	NA
(HGT)	400	687	1005	1324	1667		FAF-MAPT	NA					

STRAIGHT-IN	CAT	A	B	C	D	E	
	DA / (OCH)	373' / (310')					NA
LNNAV/VNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 1400 / NIL					
	MDA / (OCH)	470' / (400')					
LNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 1600 / NIL		NIL / 1800 / NIL			
	CIRCLING	MDA / (OCH)	NA				
		VIS (m)					

CHANGES: PROC. VES.