

**INSTRUMENT APPROACH
CHART (IAC)**

OIAPOQUE / Oiapoque (SBOI)

RNP Z RWY 03

(CAT A, B, C)



AD ELEV: 53'

ATIS NIL	APP NIL	AFIS OIAPOQUE 125.90	GNDC NIL
TEMP LNAV/VNAV MIN 10°C / MAX 45°C	FINAL CRS 030°	FAF: 1700'	LNAV/VNAV DA / (OCH): 525' / (472')
		MDA / (OCH): 560' / (510')	

APCH Perdida: Subir para **3000'** na proa **050**. Após cruzar **1200'**, curvar à DIREITA direto OI019 para espera.

Missed APCH: Climb to **3000'** on heading **050**. After passing **1200'**, turn RIGHT direct OI019 for holding.

DEPARTAMENTO DE CONTROLE DO ESPAÇO AEREO

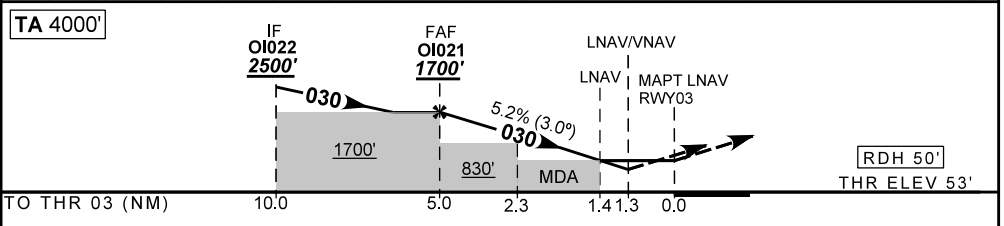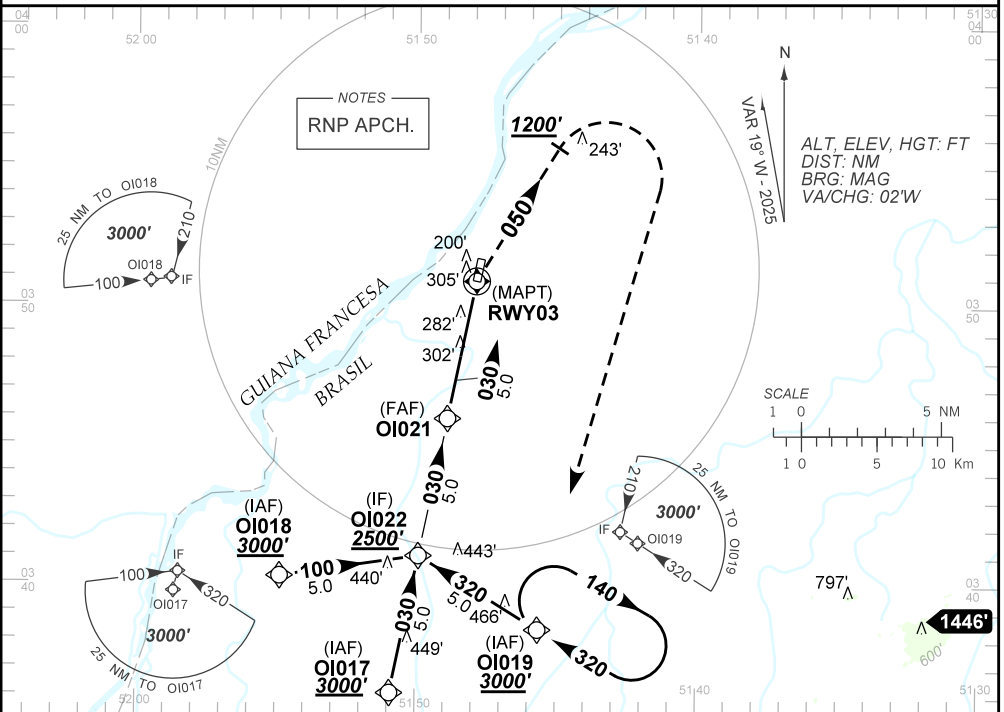

	OI021	4.0	3.0	2.3	1.4	RWY03	Ground Speed (KT)	090	110	130	150	170	190
	1700	1377	1058	835	560	ALT	FPM	500	600	700	800	NA	
	1647	1324	1005	782	510	(HGT)	FAF-MAPT	NA					

STRAIGHT-IN	CAT	A	B	C	D	E
	DA / (OCH)	525' / (472')				
LNAV/VNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 2200 / NIL			NA	
	MDA / (OCH)	560' / (510')				
LNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 2200 / NIL		NIL / 2400 / NIL		
	MDA / (OCH)	NA				
CIRCLING	VIS (m)	NA				

CHANGES: OBST. PROC. VAR.