

INSTRUMENT APPROACH CHART (IAC)



PORTO ALEGRE / Salgado Filho, INTL (SBPA)

AD ELEV: 30'

RNP Z RWY 11

D-ATIS 132.35	APP PALEGRE 119.00 120.10 120.55 128.90	TWR PALEGRE 118.10	GNDC PALEGRE 121.90
TEMP LNAV/VNAV MIN -10° C / MAX 50° C	FINAL CRS 109°	FAF: 1720'	LNAV/VNAV DA / (OCH): 407' / (396')
		LNAV: MDA / (OCH): 450' / (440')	

APCH Perdida: Subir para **5000'**. Manter proa **109** até **3000'**. Curvar à DIREITA direto VUGET para espera.
Missed APCH: Climb to **5000'**. Maintain heading **109** up to **3000'**. Turn RIGHT direct VUGET for holding.

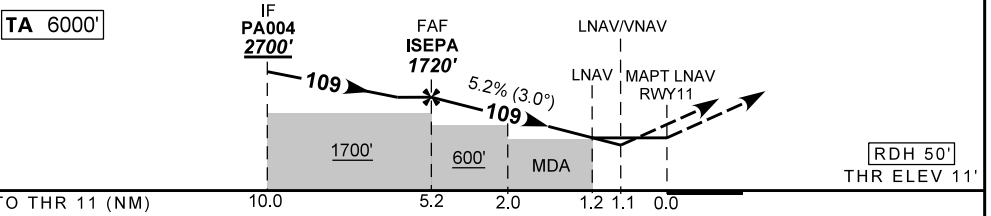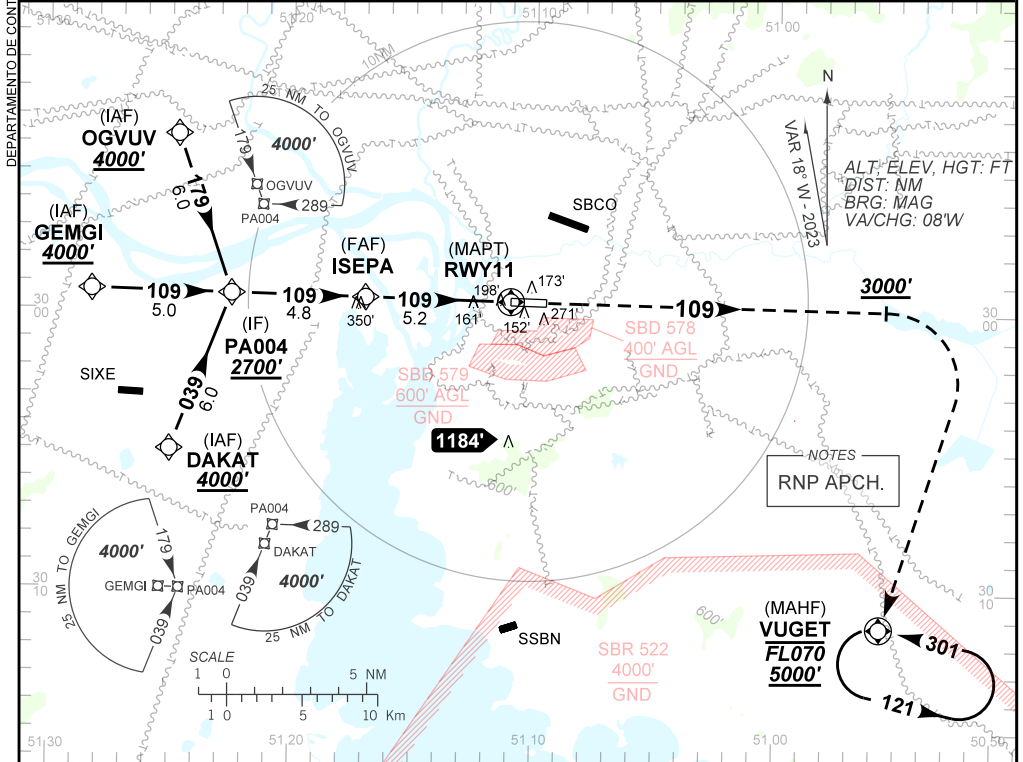

TO THR 11 (NM)	ISEPA	4.0	3.0	2.0	1.2	RWY11	Ground Speed (KT)	090	110	130	150	170	190
		1720	1335	1016	698	450		ALT (HGT)	FPM	500	600	700	800
		1709	1324	1005	687	440	(HGT)	FAF-MAPT	NA				

STRAIGHT-IN	CAT	A	B	C	D	E
	LNAV/VNAV	DA / (OCH)	407' / (396')			NA
LNAV	ALS/NO ALS/ RVR ALS (m)	1100 / 1800 / NIL				
	MDA / (OCH)	450' / (440')				
CIRCLING	ALS/NO ALS/ RVR ALS (m)	1100 / 1800 / NIL		1300 / 2000 / NIL		
	MDA / (OCH)	NA				
	VIS (m)					

CHANGES: HDG. LAYOUT. VAR.