



**INSTRUMENT APPROACH
CHART (IAC)**

PORTO ALEGRE / Salgado Filho, INTL (SBPA)

AD ELEV: 12'

RNP Y RWY 29

D-ATIS 132.35	APP PALEGRE 119.00 120.10 120.55 128.90	TWR PALEGRE 118.10	GNDC PALEGRE 121.90
TEMP LNAV/VNAV MIN -10°C / MAX 50° C	FINAL CRS 288°	FAF 1650'	LNAV/VNAV DA / (OCH): 460' / (450')
APCH Perdida: 1) Subir para 4000' no rumo 288 . Após 3000' , curvar à ESQUERDA direto DAKAT para espera. 2) IAS MAX 230KT.		LNAV MDA / (OCH): 490' / (480')	
Missed APCH: 1) Climb to 4000' on course 288 . After 3000' , turn LEFT direct to DAKAT for holding. 2) MAX IAS 230 KT.			

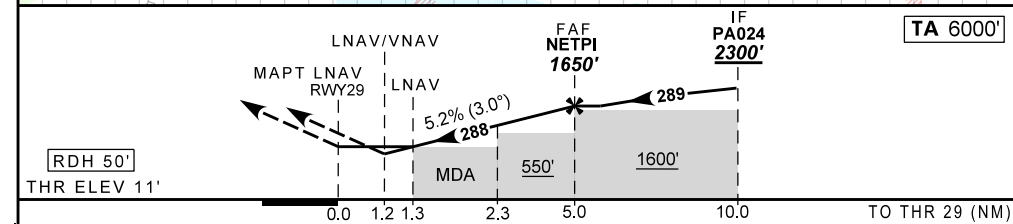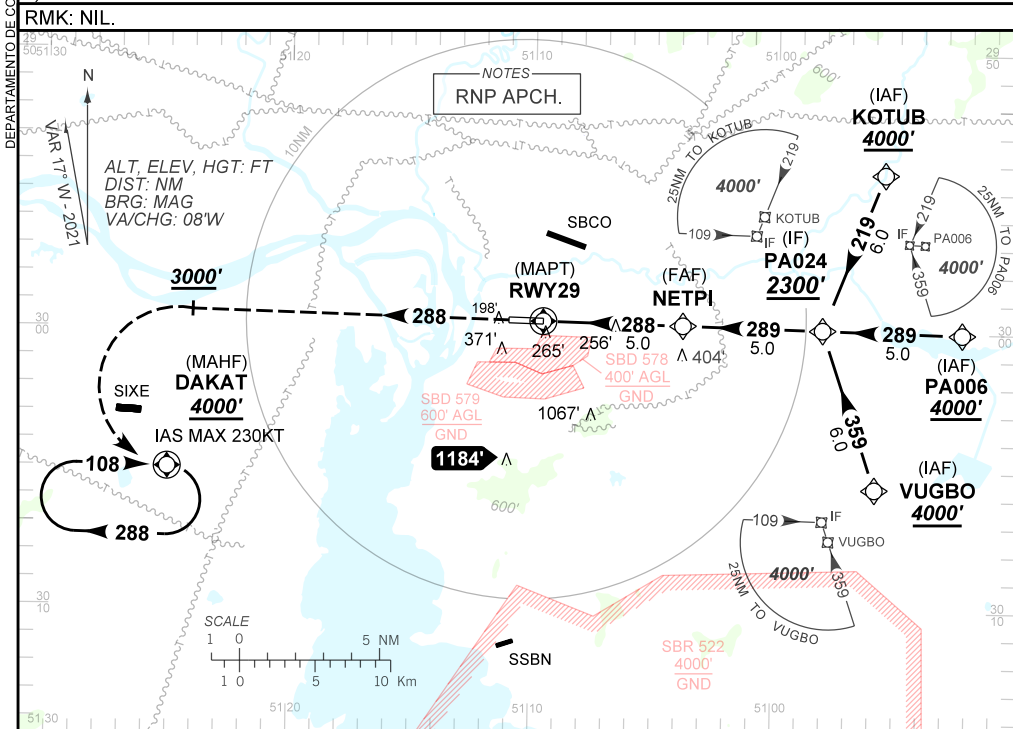

RWY29	1.2	1.3	2.3	3.0	4.0	NETPI	Ground Speed (KT)	090	110	130	150	170	190
ALT	460	490	794	1016	1334	1650	FPM	500	600	700	800	900	NA
(HGT)	450	480	783	1005	1323	1639	FAF-MAPT	NA					

STRAIGHT-IN	CAT	A	B	C	D	E
LNAV/VNAV	DA / (OCH)	460' / (450')				NA
	ALS/NO ALS/ RVR ALS (m)	NIL / 2000 / NIL				
LNAV	MDA / (OCH)	490' / (480')				
	ALS/NO ALS/ RVR ALS (m)	NIL / 2000 / NIL		NIL / 2200 / NIL		
CIRCLING	MDA / OCH	NA				
	VIS (m)	NA				

AIRAC AMDT 2105A3 20 MAY 21

SBPA_IAC_01J 1/1
IAC RNP Y RWY 29

DEPARTAMENTO DE CONTROLE DO ESPAÇO AÉREO