


AD ELEV: 56'

ARP S01 23 05 W048 28 44

D-ATIS 127.60	DCL	GNDC 121.90	TWR 118.70 121.50	APRON NIL
------------------	-----	----------------	----------------------	--------------

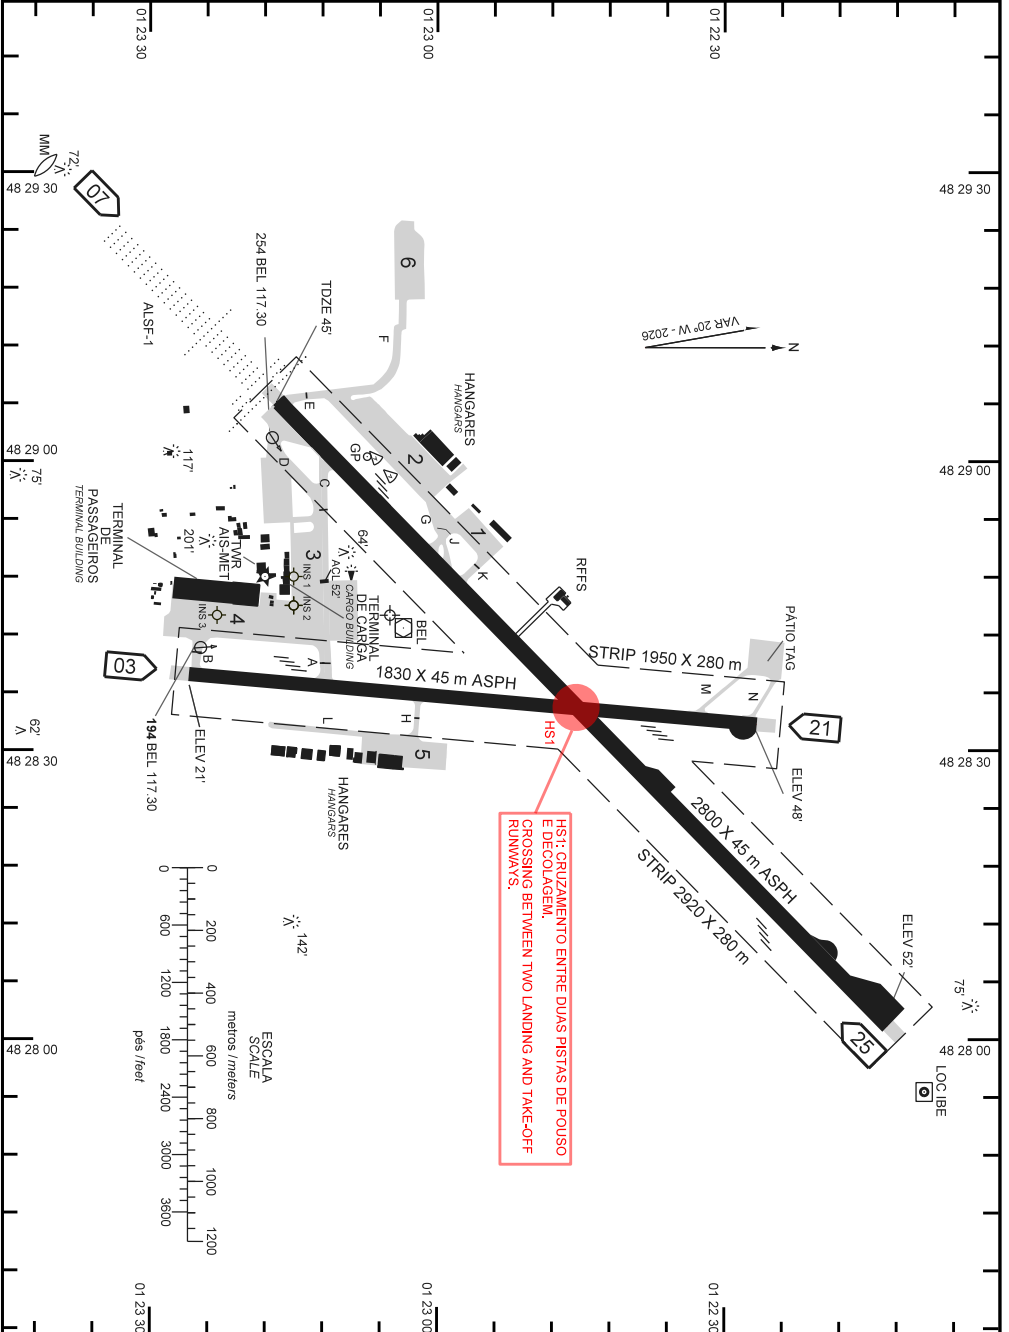

CHANGES: APRON LAYOUT, RMK PAPI FOR TWR.

ADC - SBBE: INFORMAÇÕES COMPLEMENTARES / COMPLEMENTARY INFORMATION

CARACTERÍSTICAS FÍSICAS / PHYSICAL CHARACTERISTICS											
PISTA RUNWAY				DIMENSÕES(m) DIMENSIONS(m)				PCR	TIPO DE SUPERFÍCIE SURFACE KIND		
RWY	BRG MAG	Tipo Type	RCD	RWY	SWY	CWY	STRIP	RWY	RWY	SWY	
a	b	c	d	e	f	g	h	i	j	k	
07 25	066 246	PA-1 NPA	4E 4E	2800x45			2920 x 280	670/F/A/X/T	ASPH		
03 21	025 205	NPA NPA	4E 4E	1830x45			1950 x 280	720/F/A/X/T	ASPH		

DISTÂNCIAS DECLARADAS, AUXÍLIOS VISUAIS E COORDENADAS DAS CABECEIRAS DECLARED DISTANCES, VISUAL AIDS AND THRESHOLD COORDINATES									
RWY	TORA(m)	TODA(m)	ASDA(m)	LDA(m)	AUXÍLIOS / AIDS		ALTURA GEODAL(m) GEOD HEIGHT(m)	COORDENADAS COORDINATES	
07 25	2800 2800	2800 2800	2800 2800	2800 2800	PAPI PAPI	ALSF-1	- 24,17 - 24,17	S01 23 17 W048 29 06 S01 22 13 W048 28 01	
03 21	1830 1830	1830 1830	1830 1830	1830 1830	PAPI PAPI		- 24,17 - 24,17	S01 23 26 W048 28 38 S01 22 27 W048 28 33	


SERVIÇO DE SALVAMENTO E CONTRAINCÊNDIO / RESCUE AND FIRE FIGHTING SERVICE: RFFS REQ - 07

RWY 07 / 25

Sinalização horizontal / Marking Aids



Auxílios luminosos / Lighting Aids




RWY 03 / 21

Sinalização horizontal / Marking Aids



Auxílios luminosos / Lighting Aids



RMK:

- 1) MEHT: PAPI - RWY 03: 44FT
- RWY 07: 66FT
- RWY 21: 46,6FT
- RWY 25: 65FT

CHANGES: APRON LAYOUT, RMK, PAPI, PCR, TWY