

INSTRUMENT APPROACH
CHART (IAC)

SÃO LUÍS / Marechal Cunha Machado, INTL (SBSL)



AD ELEV: 177'

RNP Z RWY 06

D-ATIS NIL	APP SÃO LUÍS 119.10	TWR SÃO LUÍS 118.90	GNDC NIL
TEMP LNAV/VNAV MIN 10°C / MAX 45°C	FINAL CRS 060°	FAF: 1820'	LNAV/VNAV DA / (OCH): 522' / (345')
		LNAV MDA / (OCH): 610' / (440')	

APCH Perdida: Subir para **4000'**. Manter proa **060** até passar **1500'**. Após, curvar à DIREITA direto SL047 para espera.
Missed APCH: Climb to **4000'**. Maintain heading **060** until passing **1500'**. After, turn RIGHT direct to SL047 for holding.

DEPARTAMENTO DE CONTROLE DE ESPAÇO AÉREO

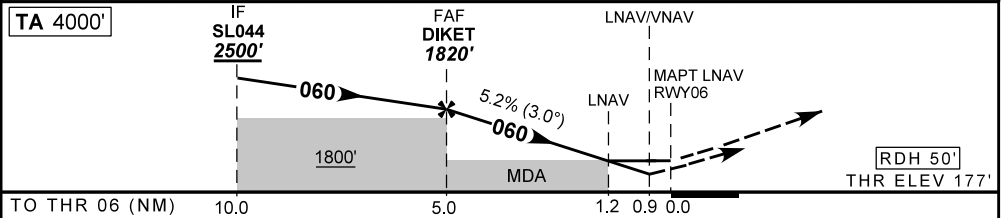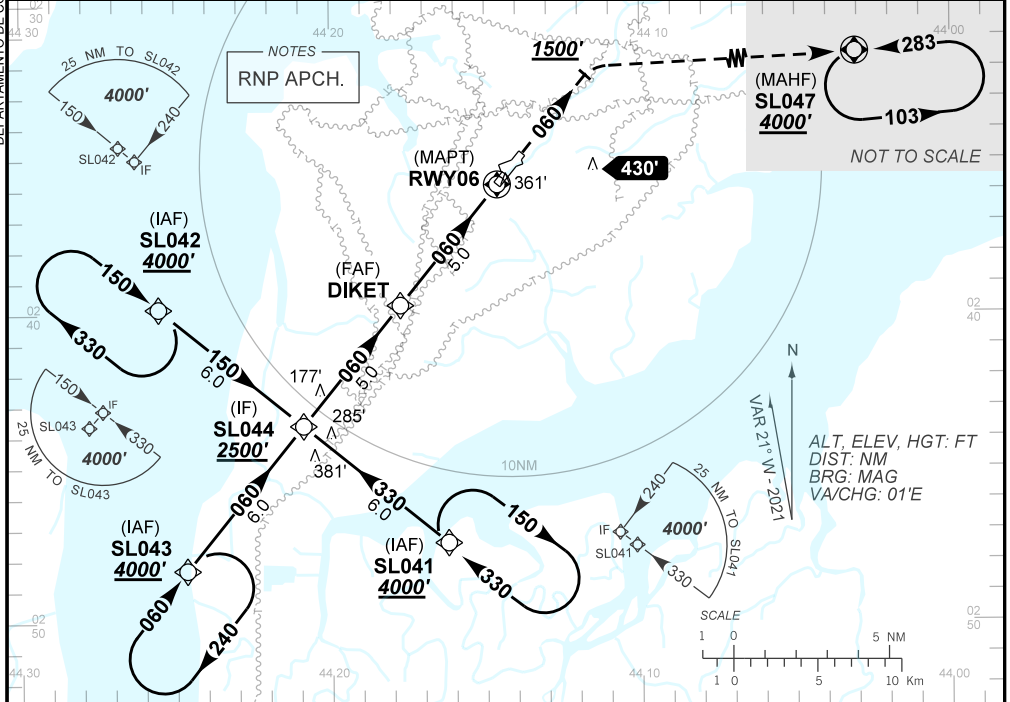

SL046	4.0	3.0	2.0	1.2	0.9	RWY06	Ground Speed (KT)	090	110	130	150	170	190
1820	1501	1183	864	610	522	ALT	FPM	500	600	700	800	900	NA
1643	1324	1006	687	440	345	(HGT)	FAF-MAPT	NIL					

STRAIGHT-IN	CAT	A	B	C	D	E
	DA / (OCH)	522' / (345')				
LNAV/VNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 1600 / NIL				
	MDA / (OCH)	610' / (440')				
LNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 1600 / NIL		NIL / 2000 / NIL		
	MDA / (OCH)	NA				
CIRCLING	VIS (m)	NA				

CHANGES: IDENT LAYOUT-PROC-TA VAR.