

**INSTRUMENT APPROACH
CHART (IAC)**



ANÁPOLIS / Campo Marechal Márcio de Souza e Mello, MIL (SBAN)

RNP Y RWY 24R

AD ELEV: 3732'

ATIS NIL	APP ANÁPOLIS 119.15 120.55 129.45 133.00	TWR ANÁPOLIS 118.30 121.25	GNDC ANÁPOLIS 121.90
TEMP LNAV/VNAV MIN 0°C / MAX 50°C	FINAL CRS 241°	FAF: 5300'	LNAV/VNAV DA / (OCH): 3346' / (310')
		LNAV MDA / (OCH): 3260' / (400')	

APCH Perdida: Subir para **7000'**. Manter rumo **241** até AN002 para espera.
Missed APCH: Climb to **7000'**. Maintain course **241** to AN002 for holding.

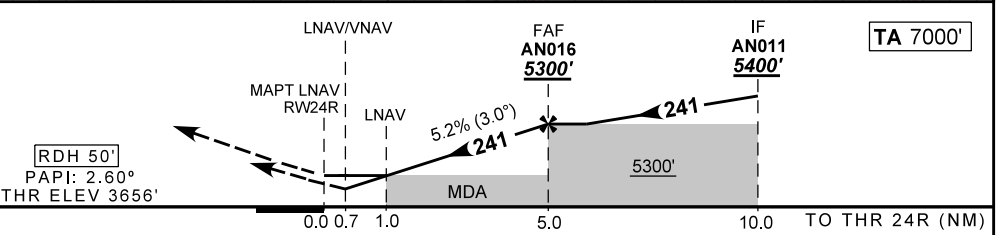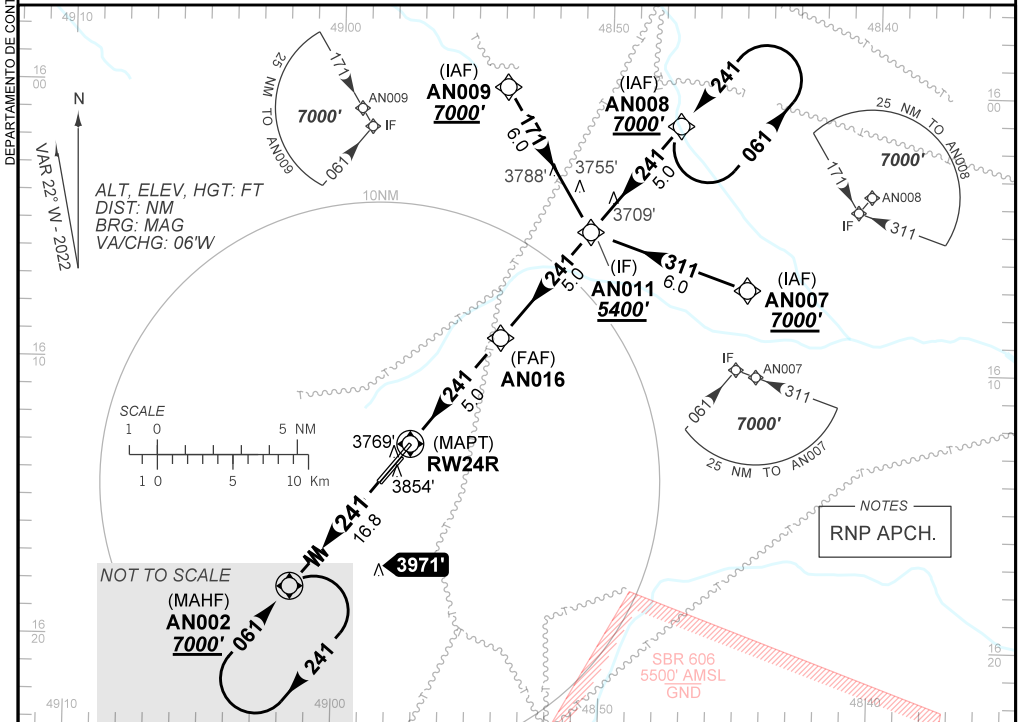

RWY24R	1.0	2.0	3.0	4.0	AN016	Ground Speed (KT)	090	110	130	150	170	190
ALT	4010	4343	4661	4980	5300	FPM	500	600	700	800	900	1000
(HGT)	360	687	1005	1324	1644	FAF-MAPT	NIL					

STRAIGHT-IN	CAT	A	B	C	D	E
	DA / (OCH)	3346' / (310')				NA
LNAV/VNAV	ALS/NO ALS/ RVR ALS (m)	800 / 1400 / NIL				NA
	MDA / (OCH)	3260' / (400')				
LNAV	ALS/NO ALS/ RVR ALS (m)	800 / 1600 / NIL		1100 / 1800 / NIL		
	MDA / (OCH)	NA				
CIRCLING	MDA / (OCH)	NA				
	VIS (m)	NA				

CHANGES: EAC. LAYOUT: PAPI OCH.