

INSTRUMENT APPROACH
CHART (IAC)

SALINÓPOLIS / Salinópolis (SNSM)

USO EXCLUSIVO ACFT MILITARES
MILITARY ACFT ONLY

RNP RWY 09



AD ELEV: 118'

ATIS NIL	APP NIL	TWR NIL	GNDC NIL
-------------	------------	------------	-------------

TEMP LNAV/VNAV MIN 0°C / MAX 50°C	FINAL CRS 091°	FAF: 1730'	LNAV/VNAV DA / (OCH): 440' / (360')	LNAV MDA / (OCH): 530' / (450')
--------------------------------------	-------------------	---------------	--	------------------------------------

APCH Perdida: Subir para **3400'**. Manter rumo **091** até **1200'**. Após, curvar à ESQUERDA direto SL006 para espera.

Missed APCH: Climb to **3400'**. Maintain course **091** until **1200'**. After, turn LEFT direct SL006 for holding.

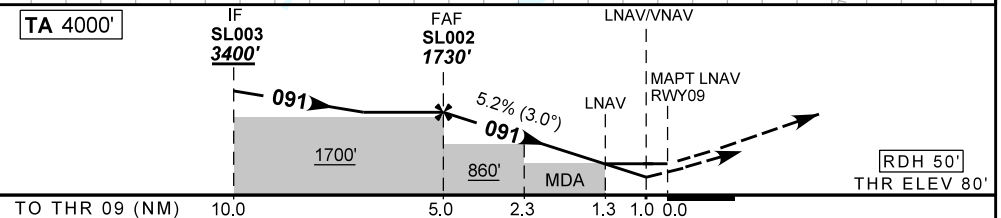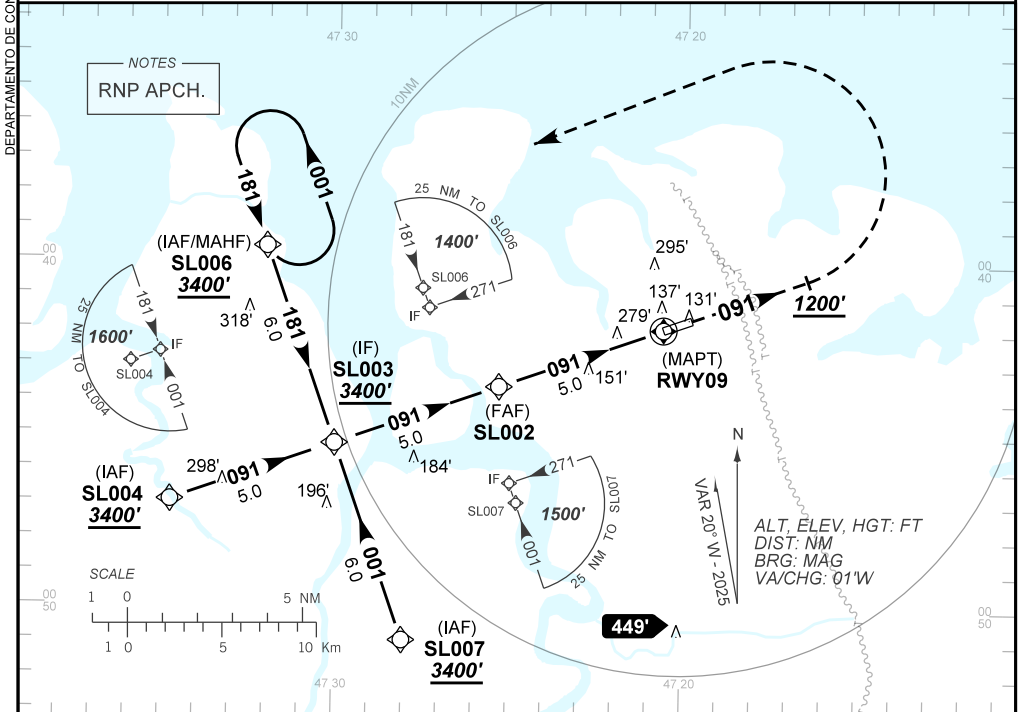

TO THR 09 (NM)	10.0	5.0	2.3	1.3	1.0	0.0
IF SL003		3400'				
FAF SL002			1730'			
LNAV/VNAV						
MAPT LNAV RWY09						
MDA						
RDH 50'						
THR ELEV 80'						

	SL002	4.0	3.0	2.3	1.3	RWY09	Ground Speed (KT)	090	110	130	150	170	190
		1730	1404	1085	863	530	FPM	500	600	700	800	900	NA
		1650	1324	1005	783	450	(HGT)						
							FAF-MAPT	NIL					
STRAIGHT-IN	CAT	A		B		C		D		E			
LNAV/VNAV	DA / (OCH)	440' / (360')											
	ALS/NO ALS/ RVR ALS (m)	NIL / 1600 / NIL											
LNAV	MDA / (OCH)	530' / (450')											
	ALS/NO ALS/ RVR ALS (m)	NIL / 1600 / NIL			NIL / 2100 / NIL								
CIRCLING	MDA / (OCH)	620' / (510')			810' / (700')								
	VIS (m)	NIL / 1600 / NIL			NIL / 3600 / NIL								

CHANGES: LAYOUT.

AIRAC AMDT 2604A1 16 APR 26

USO EXCLUSIVO ACFT MILITARES / MILITARY ACFT ONLY

SNSM_IAC_00D 1/1
IAC RNP RWY 09