

**INSTRUMENT APPROACH
CHART (IAC)**

SÃO GONÇALO DO AMARANTE / Gov. Aluizio Alves, INTL (SBSG)



AD ELEV: 273'

RNP Z RWY 12

D-ATIS 127.60	APP NATAL 119.30 119.65 120.65 129.80	TWR SÃO GONÇALO 118.20 118.85	GNDC SÃO GONÇALO 121.70
-------------------------	---	---	-----------------------------------

TEMP LNAV/VNAV MIN 0°C / MAX 50°C	FINAL CRS 120°	FAF: 1590'	LNAV/VNAV DA / (OCH): 619' / (349')	LNAV MDA / (OCH): 760' / (490')
---	--------------------------	----------------------	---	---

APCH Perdida: Subir para **3500'**. Manter proa **120** até **2000'**. Após, curvar à ESQUERDA direto NIMPI para espera.
Missed APCH: Climb to **3500'**. Maintain heading **120** until **2000'**. After, turn LEFT direct NIMPI for holding.

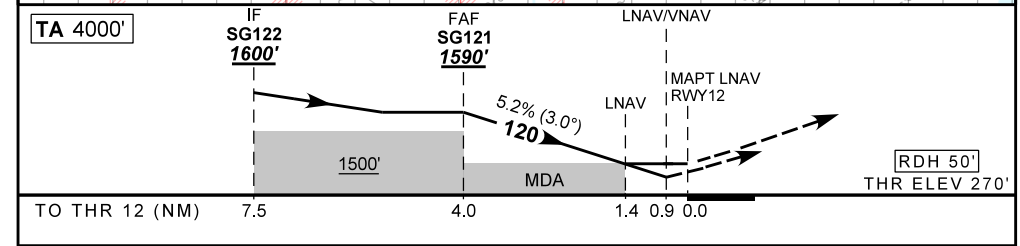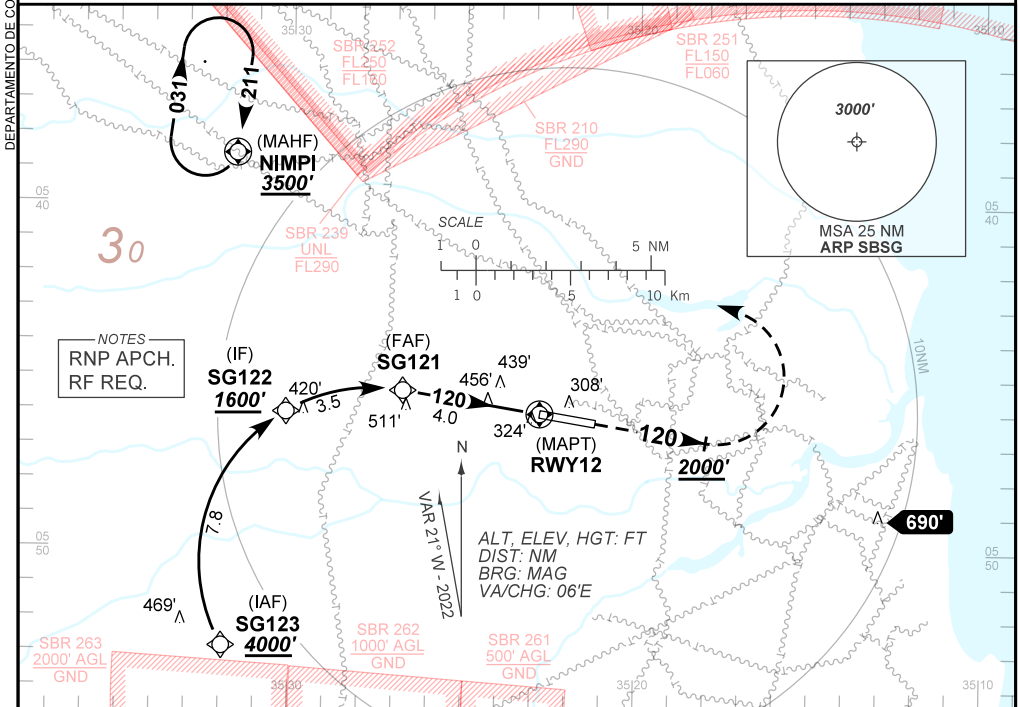

	SG121	3.0	2.0	1.4	RWY12	Ground Speed (KT)	090	110	130	150	170	190
	1590	1275	957	760	ALT	FPM	500	600	700	800	900	NA
	1320	1005	687	490	(HGT)	FAF-MAPT	NIL					

STRAIGHT-IN	CAT	A	B	C	D	E	
	DA / (OCH)	619' / (349')					NA
LNAV/VNAV	ALS/NO ALS/ RVR ALS (m)	900 / 1600 / 850					
	MDA / (OCH)	760' / (490')					
LNAV	ALS/NO ALS/ RVR ALS (m)	900 / 1600 / 850			1500 / 2300 / 1400		
	MDA / (OCH)	NA					
CIRCLING	VIS (m)	NA					